




# iBook G4 12" 800 MHz-1.2 GHz LCD Cover Replacement


Written By: Andrew Bookholt

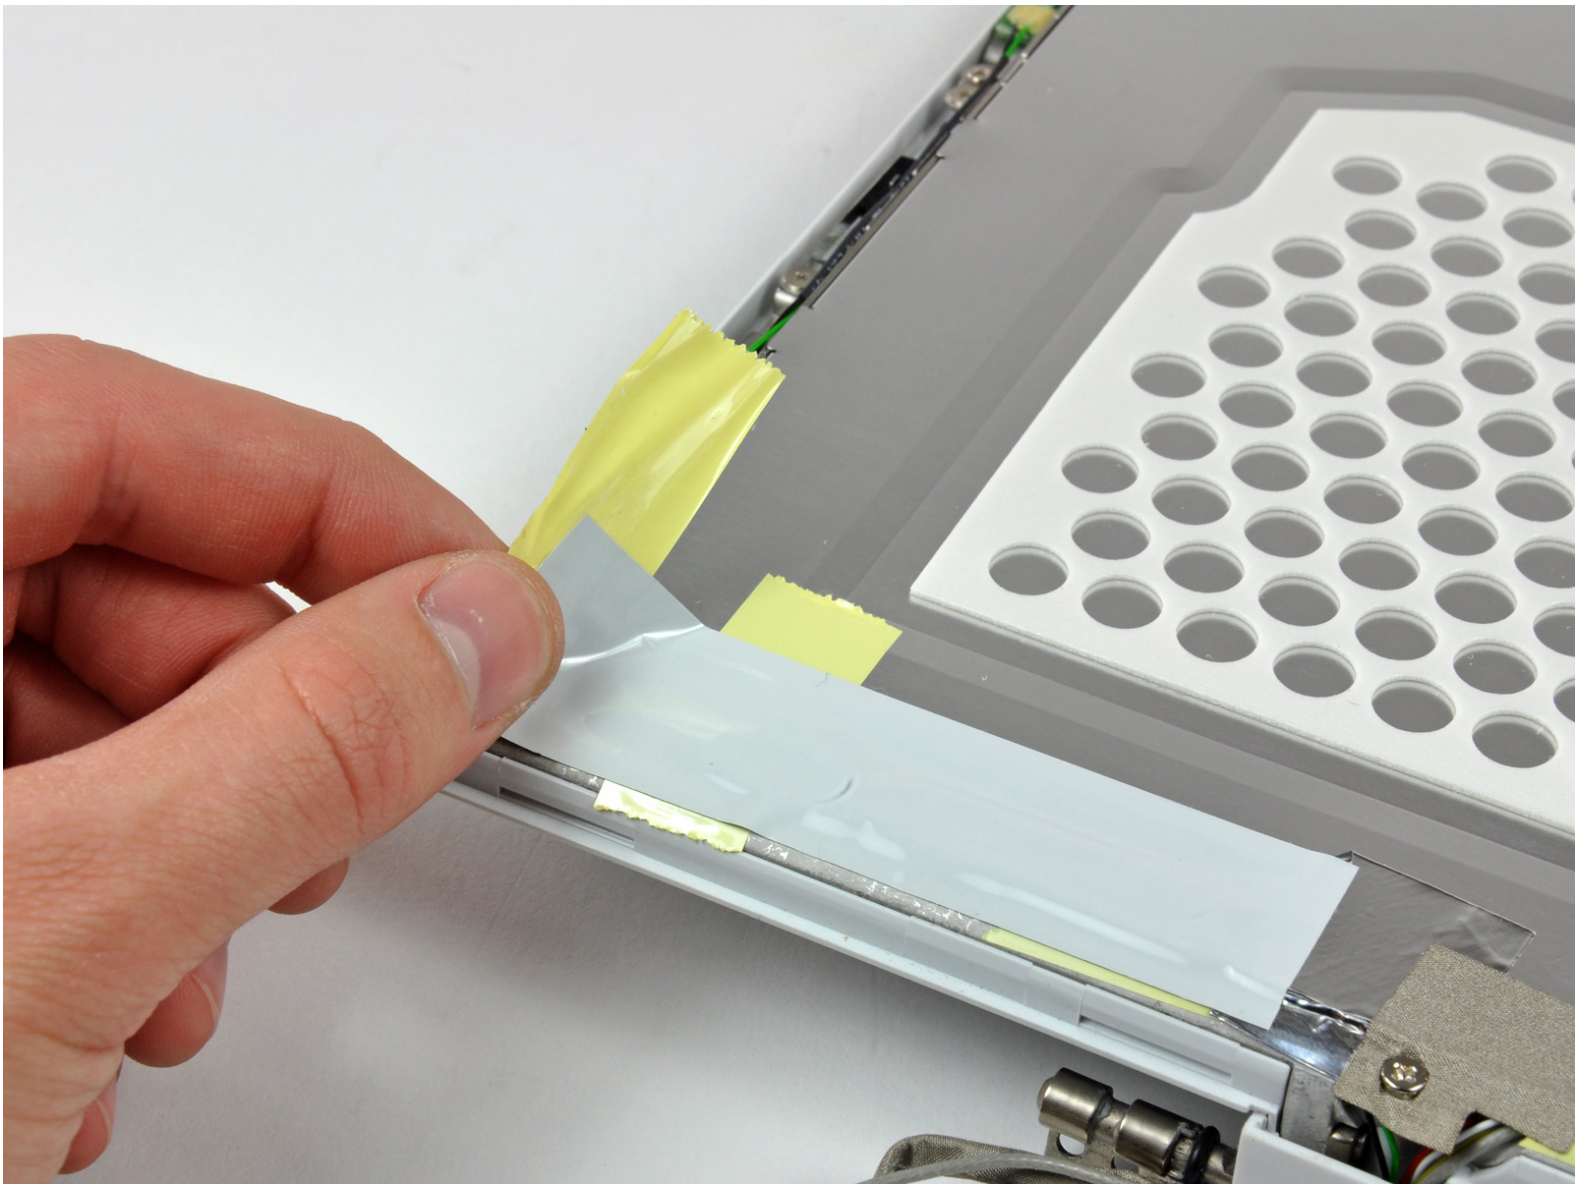

## INTRODUCTION



This guide is an internal private guide that serves as a prereq.

## Step 1 — LCD Cover

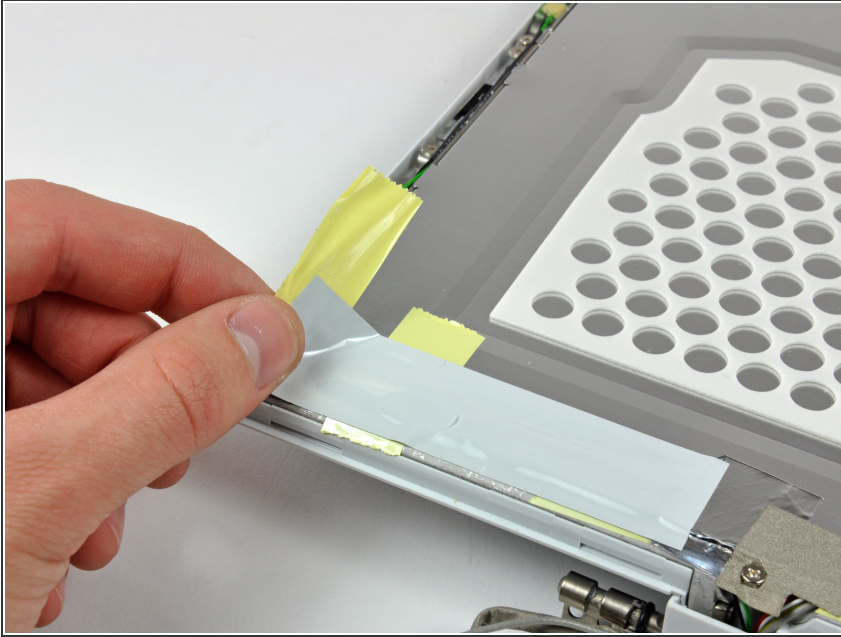

- Remove the large piece of tape near the lower right corner of the display.


## Step 2

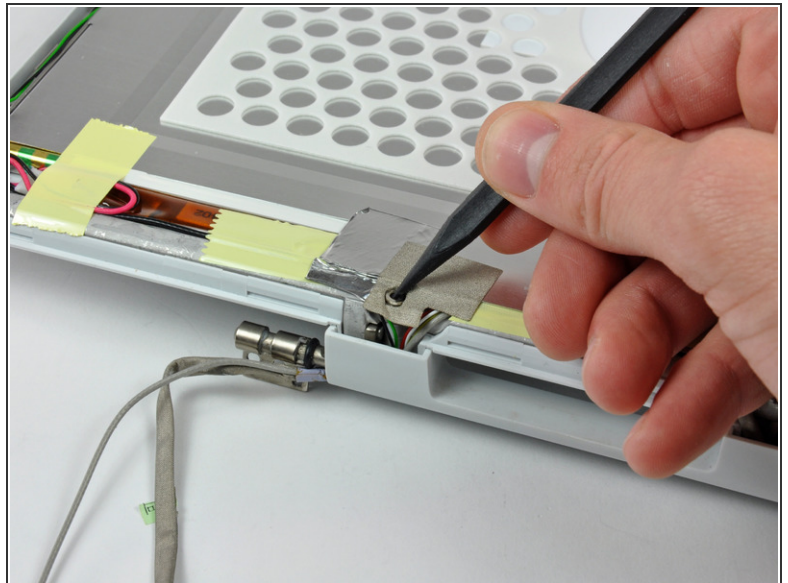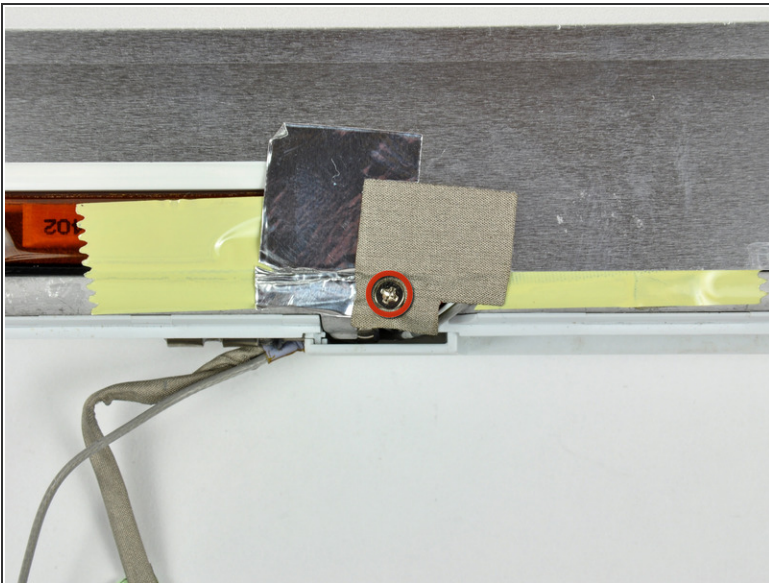

- Remove the single screw inserted through the piece of EMI tape near the bottom edge of the display (it's the first of the two clutch cover screws).
- Use the tip of a spudger to remove the small washer under the screw you just removed.




## Step 3

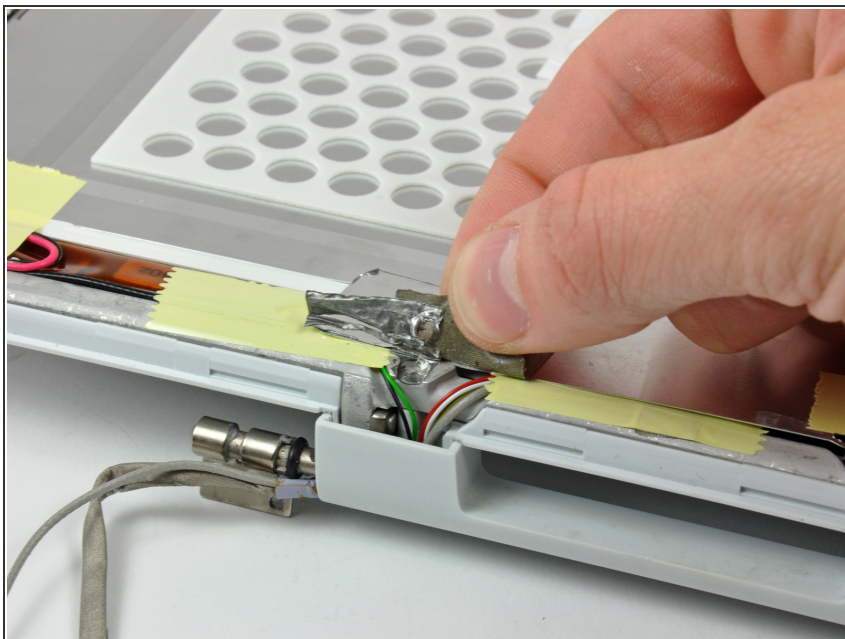

- Peel the aluminum/EMI tape as one piece off the cast aluminum frame of the clutch hinges.
- ⓘ It is not necessary to peel the tape off the thin steel LCD cover.

## Step 4

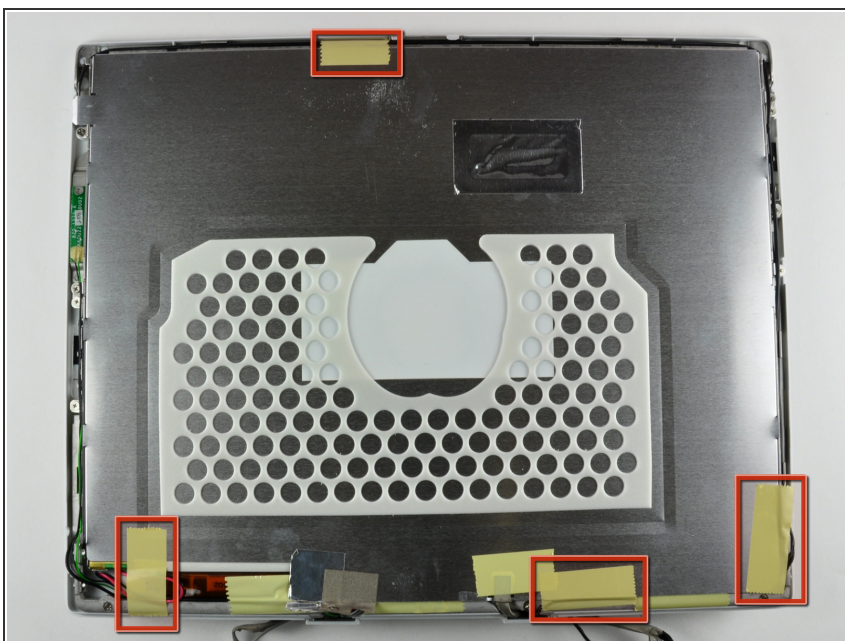

- Remove the pieces of readily removable tape from around the perimeter of the display.

## Step 5




- Remove the piece of aluminum tape near the center of the LCD cover.
- Peel back the piece of tape securing the display data cable ground loop to the thin steel LCD cover.

## Step 6



- Remove the two Phillips screws securing each side of the LCD to the clutch hinge frame (four screws total).

## Step 7

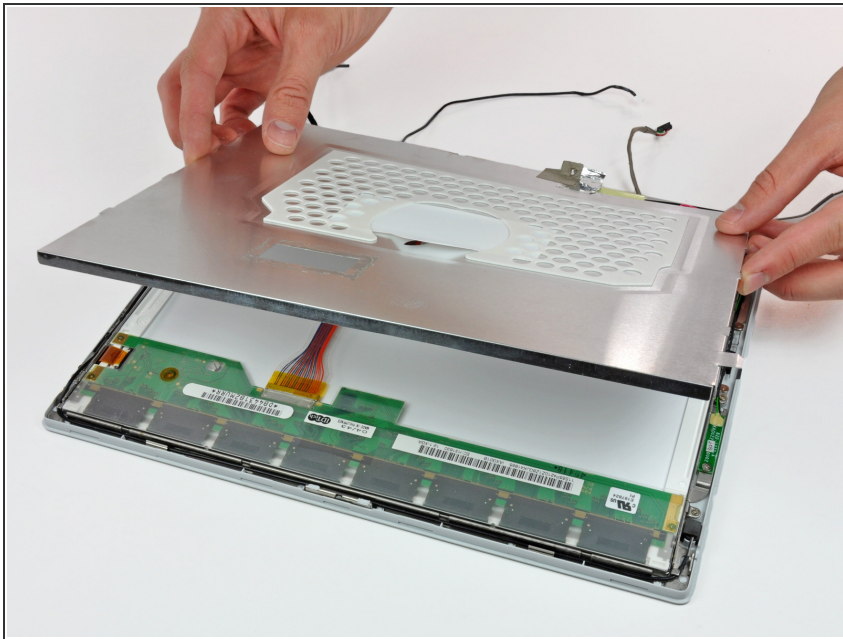

- Lift the thin steel LCD cover off the LCD.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-28 12:01:30 PM.